

Ausführungen | Versions ST-3100


Bezeichnung Description	Abmessungen Dimensions					Version	Material Material	Gewicht Weight	Artikel-Nr. Item-No.
	E	D	L	L1	SW				
Steckkupplung Coupling	G1/2 IG G1/2 female	45 mm	51 mm	30 mm	30 mm	A	Edelstahl stainless steel	0,151 kg	20 3100 455
Steckkupplung Coupling	G3/8 IG G3/8 female	45 mm	51 mm	30 mm	30 mm	A	Edelstahl stainless steel	0,160 kg	20 3100 456
Steckkupplung Coupling	G1/2 IG G1/2 female	32 mm	44 mm	20 mm	30 mm	B	Edelstahl stainless steel	0,129 kg	20 3100 460
Steckkupplung Coupling	G3/8 IG G3/8 female	32 mm	44 mm	20 mm	30 mm	B	Edelstahl stainless steel	0,135 kg	20 3100 461
Steckkupplung Coupling	G1/2 AG G1/2 male	32 mm	63 mm	20 mm	30 mm	B	Edelstahl stainless steel	0,188 kg	20 3100 655
Steckkupplung Coupling	G1/2 AG G1/2 male	45 mm	69 mm	30 mm	30 mm	A	Edelstahl stainless steel	0,210 kg	20 3100 656
Kupplungsstecker Coupling Plug	G1/2 IG G1/2 female		46,5 mm	22 mm	27 mm	C	Edelstahl stainless steel	0,090 kg	04 0005 661
Kupplungsstecker Coupling Plug	G1/2 AG G1/2 male		46,5 mm	22 mm	24 mm	D	Edelstahl stainless steel	0,067 kg	04 0005 662
Kupplungsstecker Coupling Plug	G1/4 IG G1/4 female		34,5 mm	10 mm	22 mm	C	Edelstahl stainless steel	0,045 kg	04 0005 665
Kupplungsstecker Coupling Plug	G3/8 IG G3/8 female		41 mm	16,5 mm	24 mm	C	Edelstahl stainless steel	0,061 kg	04 0005 667
Kupplungsstecker Coupling Plug	G3/8 AG G3/8 male		46,5 mm	22 mm	24 mm	D	Edelstahl stainless steel	0,067 kg	04 0005 468

Technische Daten | Specification


Druck Pressure	200 bar		2900 psi
Durchfluss Flow rate	100 l/min		26,4 US gal/min
Temperatur Temperature	150 °C		300 °F

mit blauen Kunststoffhandrad
with blue plastic protection cup


Version A

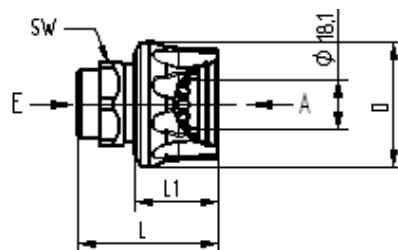

Version B

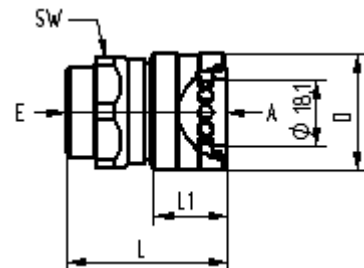

Version C



Version D

